




PHÖNIX

STRACK

DAUME
REGELARMATUREN

SIP Solent & Pratt
Phönix Ltd

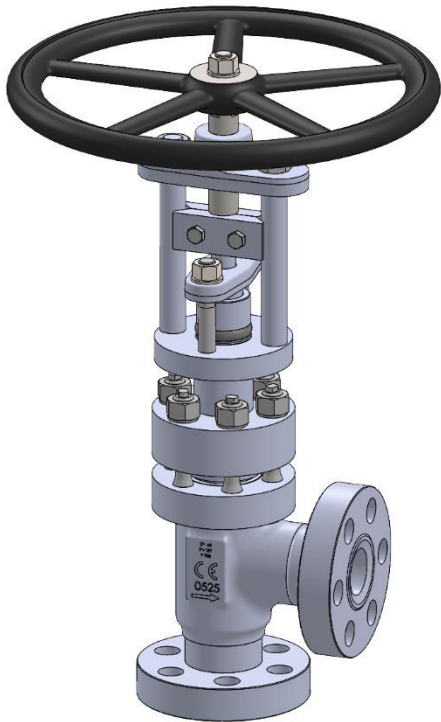

Globe Valve Type 355HS PN 325

Phönix Valve Group
Am Stadtbruch 6
34471 Volkmarsen

Phone:
web:
eMail:

+49 5693 988 0
www.phoenix-valvegroup.com
info@phoenix-valvegroup.com



Model 355HS

Angle type / Protected Bellows

Applications & Design Features

Fig. No. 355HS

Applications

Type 355HS is designed for critical service high-pressure applications involving lethal, toxic, corrosive, inflammable, volatile, radiating, or expensive fluids.

New bellows design:

- multiple walls
- special design for hydrogen applications
- pressure hydrogen resistance is guaranteed

The most common applications are:

- Hydrogen
- Ammonia
- Urea grade
- Fluids of similar nature

The unique valve design guarantees reliable and excellent protection against leaks or fugitive emissions. The stem seal requires virtually no maintenance due to leak free weld connections of the bellows with bonnet and stem. Constant packing monitoring and re-packing is eliminated. In the unlikely event of a bellows failure the backup packing guarantees safe valve performance until the next scheduled shutdown.

The unique phönix bellows -sealed valve design allows to replace the stuffing box sealed valves, which do not fulfill the requested demands to safety and reduction of emissions.

Using the flexible bonnet flange system from phönix makes it possible to replace the stuffing box bonnet/ yoke of supplied/ installed stuffing box sealed valves or existing valves in the pipeline through the bellows-sealed bonnet/ yoke from phönix type 355. This replacement can be implemented without regard to manufacturer of valves with stuffing box stem sealing system.

Design Features

Bellows and Packing




- bellows protected in extended bonnet against direct impingement from product flow
- multiple walls and hydroformed bellows
- up to 10.000 bellows operations guaranteed, depending from the application and size of the valve

Stem

- two-piece stem protects the bellows against torque stress
- design eliminates stem bearings along with their maintenance needs
- guided stem on top and bottom
- one-piece stem design upon request

Seats

- solid hardfacings for outstanding corrosion and wear resistance
- knife edge metal-to-metal seat for bubble-tight shutoff
- replaceable disc for inexpensive maintenance

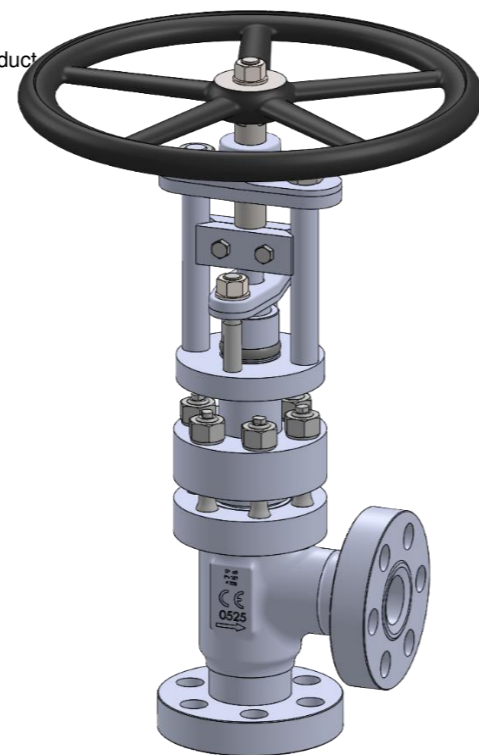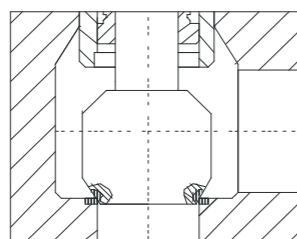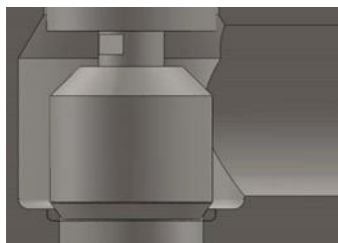

Model 355HS

Angle type / Protected Bellows

Applications & Design Features



Body and Bonnet

- bodies are integral forgings
- protected / designed against switch of failure through electrical actuators - inherent safety is guaranteed
- extended bonnet provides for good thermal insulation
- body bonnet joint gasket is fully confined to prevent gasket flow or blowout
- straight way type for bodies are available (model 350 hs)

integral body




gasket fully confined

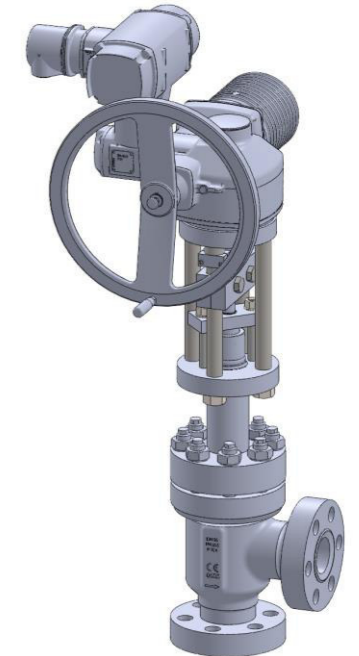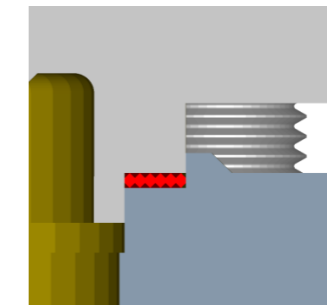

Safety gland / coupling:


The external auxiliary packed gland to the bellows prevent leakage to atmosphere should the bellows fail. The gland is externally adjustable.

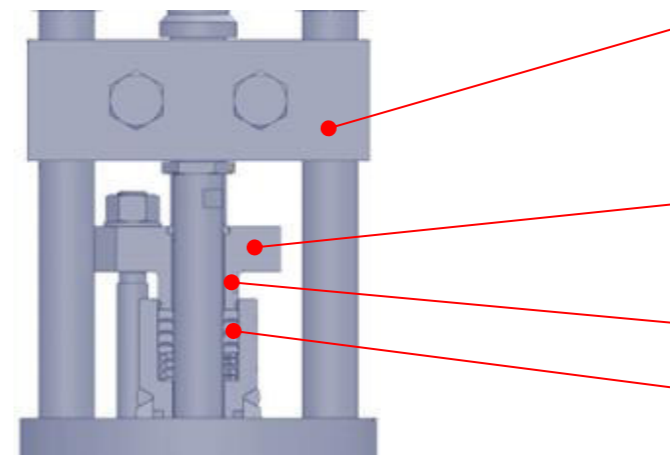

- Coupling
Ensures only axial movement of the bellows and of the disc, thereby preventing torsion of the bellows, and a rubbing of the conical sealing surface on the body sealing surface
- Gland follower wiper and o-ring
Protection against the penetration of water or contaminations
- Safety gland
- Graphite packing

Stem guidance / disc:

The guide ring significantly reduces the risk of buckling of the stem, avoiding pressure surges on the bellows and prevents abrasion to the bellows.

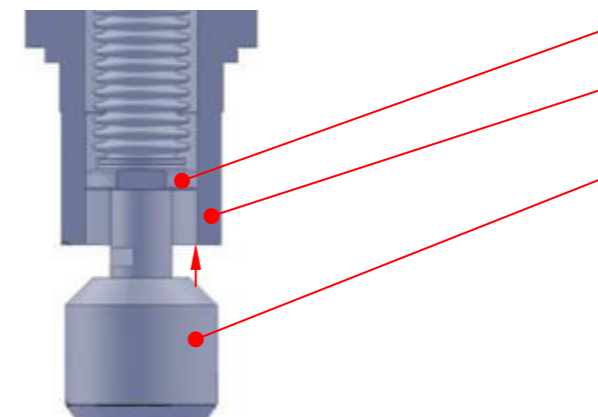

- guide ring
- the machined body surface guaranteed reduced friction
- welded disc with stem, thus preventing rotation movements of the disc
- at full open disc is back seated against bonnet

= zero emissions, zero seat leakage, low maintenance



Model 355HS

Angle type / Protected Bellows

Standard Materials of Construction


Fig. No. 355HS / D

Options

Other materials per customer requirements are available!

Notes

Phönix pressure hydrogen resistance is guaranteed specification without notice!

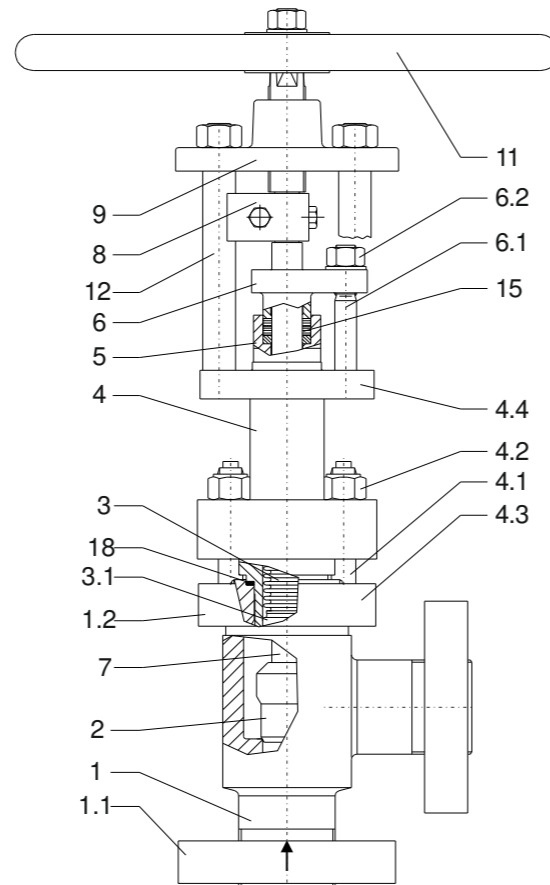

Materials

Item	Part Name	Carbon steel (355C)		Stainless steel (355V)		Heat resis. Carbon st. (355W)	
		20°C / 375bar 200°C / 270bar DIN	BASF-Norm	20°C / 375bar 200°C / 270bar DIN	BASF-Norm	20°C / 400bar 500°C / 285bar DIN	BASF-Norm
1	Body	1.0460	S 2	1.4571	RA 4	1.7779	N 9
	Seat overlay	Stellite 21 (≈ 32HRC)		Stellite 21 (≈ 32HRC)		Stellite 21 (≈ 32HRC)	
1.1	Flange	1.7258/ 1.7218	K 3	1.7258/ 1.7218	K 3	1.7258/ 1.7218	K 3
1.2	Flange	1.7258/ 1.7218	K 3	1.4057	-	1.7258/ 1.7218	K 3
2	Disc	1.4021/ 1.0460	RM 2 / S 2	1.4571	RA 4	1.4922	N 11
	Overlay	Stellite 6 (≈ 42HRC)		Stellite 6 (≈ 42HRC)		Stellite 6 (≈ 42HRC)	
3	Bellows	1.4571*	RA 4	1.4571*	RA 4	2.4856	-
3.1	Guide ring	1.4571	RA 4	1.4571	RA 4	1.4571	RA 4
4	Bonnet	1.0460	S 2	1.4571	RA 4	1.7779	N 9
4.1	Stud bolt	1.7709	K 5	1.7709 tlp	K 5	1.7709	K 5
4.2	Hex. nut	1.7218	K 2	1.7218 tlp	K 2	1.7218	K 2
4.3	Flange	1.7258/ 1.7218	K 3 / K 2	1.4057	-	1.7258/ 1.7218	K 3 / K 2
4.4	Flange	1.0460	S 2	1.4571	RA 4	1.0460	S 2
5	Stuffing box body	1.4571	RA 4	1.4571	RA 4	1.4571	RA 4
6	Gland follower	1.0460	S 2	1.4571	RA 4	1.4922	N 11
6.1	Stud bolt	1.7709	K 5	1.7709 tlp	K 5	1.7709	K 5
6.2	Hex. nut	1.7218	K 2	1.7218 tlp	K 2	1.7218	K 2
7	Lower stem	1.4021	RM 2	1.4542	17-4PH	1.4922	N 11
8	Coupling	1.4571	RA 4	1.4571	RA 4	1.4571	RA 4
9	Bridge	1.0460	S 2	1.0460 QPQ	S 2	1.0460	S 2
10	Upper stem	1.4057	-	1.4057	-	1.4057	-
11	Handwheel	0.7040	-	0.7040	-	0.7040	-
12	Pillar	1.4057	-	1.4057	-	1.4057	-
15	Packing	Graphite		Graphite		Graphite	
18	Gasket	Grooved SS / graphite		Grooved SS / graphite		Grooved SS / graphite	

* 2.4856 on request



Model 355HS

Angle type / Protected Bellows

Handwheel operated valves


Fig. No. 355HS / PN325 DN6 - DN120

Testing / Marking

- Design acc. to PED 2014/68/EU / TA-Luft 2000 / VDI 2440
- TÜV approved strength calculation acc. to DIN EN12516-2 available for body and bonnet
- Standard tests acc. to DIN EN12266, ISO 5208, resistance and shell strength and leak test acc. to P10 and P11
- Leak test on closure acc. to P12 (leakage rate A = tight)
- ASME B16.34 / MSS SP 61 / API 598 / BS 6755

Preservation

- Disc secured in closed position
- Unfinished surfaces protected against rust

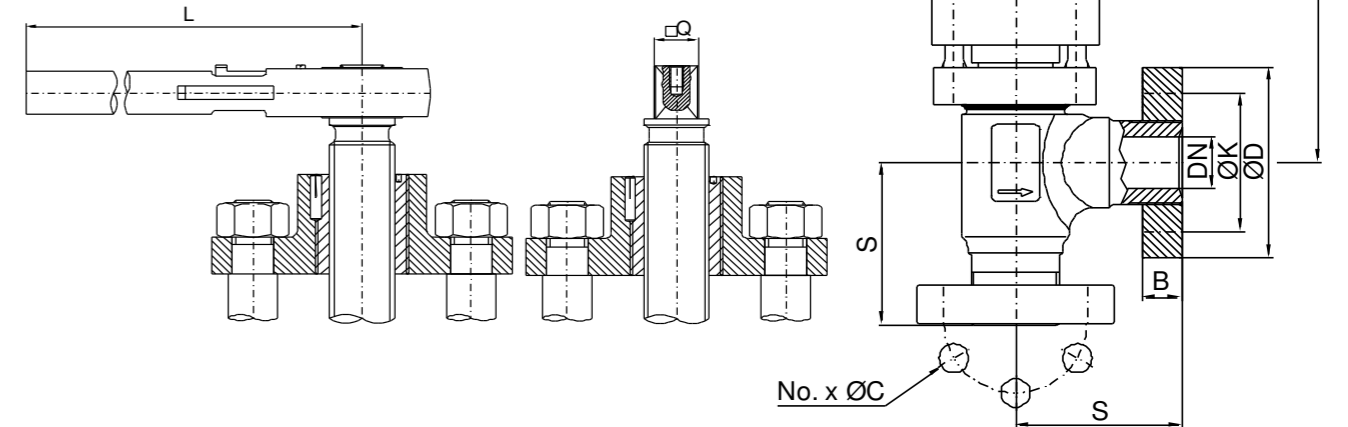

Dimensions & Weights & Flow Coefficients

DN	Unit	S	H	ØR	L	□Q	Flange facing type B1				Weight	Kv [m³/h]	cv [USGal/min]
							ØK	No x ØC	ØD	B			
6	[mm]	60	405	200			42	3 x 15	70	15	14 kg	0.6	
	[in]	2.36	15.94	7.87			1.65	3 x 0.59	2.76	0.59	31 lbs	0.7	
10	[mm]	85	405	200			60	3 x 18	95	20	15 kg	2.4	
	[in]	3.35	15.94	7.87			2.36	3 x 0.71	3.74	0.79	33 lbs	2.79	
16	[mm]	95	405	200			68	3 x 18	105	20	17 kg	3.9	
	[in]	3.74	15.94	7.87			2.68	3 x 0.71	4.13	0.79	37 lbs	4.53	
24	[mm]	110	435	315			80	4 x 18	115	22	31 kg	7.7	
	[in]	4.33	17.13	12.40			3.15	4 x 0.71	4.53	0.87	68 lbs	8.95	
30	[mm]	120	435	315			95	4 x 22	135	25	36 kg	15	
	[in]	4.72	17.13	12.40			3.74	4 x 0.87	5.31	0.98	79 lbs	17.44	
45	[mm]	150	515	400			115	6 x 26	165	35	56 kg	26	
	[in]	5.91	20.28	15.75			4.53	6 x 1.02	6.50	1.38	123 lbs	30	
58	[mm]	170	630	500			145	6 x 30	200	40	73 kg	42	
	[in]	6.69	24.80	19.69			5.71	6 x 1.18	7.87	1.57	161 lbs	49	
70	[mm]	200	705		1000/ 1200	32	170	6 x 33	225	50	136 kg	91	
	[in]	7.87	27.76		39.37/ 47.24	1.26	6.69	6 x 1.30	8.86	1.97	300 lbs	106	
90	[mm]	235	780		1500	41	195	6 x 36	260	55	195 kg	144	
	[in]	9.25	30.71		59.06	1.61	7.68	6 x 1.42	10.24	2.17	430 lbs	167	
120	[mm]	290	955		2000	41	255	8 x 42	330	70	250 kg	236	
	[in]	11.42	37.60		78.74	1.61	10.04	8 x 1.65	12.99	2.76	551 lbs	274	

Contact us



Volkmarsen, Germany

Sales and Operations

Phönix Valve Group GmbH

Volkmarsen, Germany
Phone: +49 5693 988 0
Email: info@phoenix-valvegroup.com
Website: www.phoenix-valvegroup.com

Phönix Armaturen Werke-Bregel GmbH

Volkmarsen, Germany
Phone: +49 5693 988 0
Email: info@phoenix-valvegroup.com
Website: www.phoenix-valvegroup.com

Strack GmbH

Volkmarsen, Germany
Phone: +49 5693 988 0
Email: info@phoenix-valvegroup.com
Website: www.phoenix-valvegroup.com

PAW SARL

Genay Cedex, France
Phone: +33 437 408 195
Email: commercial@phoenix-valvegroup.com
Website: www.phoenix-valvegroup.com

Daume Regelarmaturen GmbH

Volkmarsen, Germany
Phone: +49 5693 988 0
Email: info@phoenix-valvegroup.com
Website: www.phoenix-valvegroup.com

Solent & Pratt Phönix Ltd.

Volkmarsen, Germany
Phone: +49 5693 988 0
Email: info@phoenix-valvegroup.com
Website: www.phoenix-valvegroup.com



While this information is presented in good faith and believed to be accurate, Phönix Valve Group GmbH, does not guarantee satisfactory results from reliance on such information. Nothing contained herein is to be construed as a warranty or guarantee, expressed or implied, regarding the performance, merchantability, fitness or any other matter with respect to the products, nor as a recommendation to use any product or process in conflict with any patent. Phönix Valve Group GmbH, reserves the right, without notice, to alter or improve the designs or specifications of the products described herein.

© 2022 Phönix Valve Group. All rights reserved. Specifications are subject to change without notice. All trademarks are property of their respective owners

Printed in Germany
09/22-R0